



UF250BMA Series

Size : 280 x 280 x 80

Unit : mm

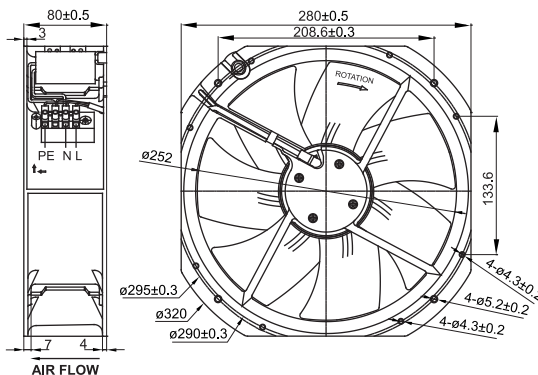

(Axial Fan)

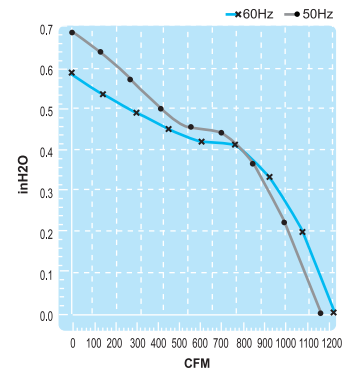

Thermal Protection

Spec. Model	Rated Voltage V	Frequency Hz	Input Power W	Rated Current A	Locked Current A	Speed RPM	Maximum Air Flow m ³ /min.	Maximum Air Flow CFM	Maximum Pressure mmH ₂ O	Maximum Pressure InchH ₂ O	Capacitor μF/VDB	Noise dB	Weight kg
UF250BMA11H1C2A	115V	50	120	1.50	1.90	2400	29.8	1050	17.8	0.70	12/250	70	2.8
		60	157	1.20	1.90	2600	31.2	1100	15.0	0.59		71	
UF250BMA23H1C2A	230V	50	119	0.52	0.83	2400	29.8	1050	17.8	0.70	4/450	70	2.8
		60	158	0.71	0.87	2600	31.2	1100	15.0	0.59		71	

CI. F



Recognized Component
 CONFORMS TO
 EN60335-1
 EN60335-2-1
 EN60335-2-21
 EN60335-2-22
 EN60335-2-23
 EN60335-2-24
 EN60335-2-25
 EN60335-2-26
 EN60335-2-27
 EN60335-2-28
 EN60335-2-29
 EN60335-2-30
 EN60335-2-31
 EN60335-2-32
 EN60335-2-33
 EN60335-2-34
 EN60335-2-35
 EN60335-2-36
 EN60335-2-37
 EN60335-2-38
 EN60335-2-39
 EN60335-2-40
 EN60335-2-41
 EN60335-2-42
 EN60335-2-43
 EN60335-2-44
 EN60335-2-45
 EN60335-2-46
 EN60335-2-47
 EN60335-2-48
 EN60335-2-49
 EN60335-2-50
 EN60335-2-51
 EN60335-2-52
 EN60335-2-53
 EN60335-2-54
 EN60335-2-55
 EN60335-2-56
 EN60335-2-57
 EN60335-2-58
 EN60335-2-59
 EN60335-2-60
 EN60335-2-61
 EN60335-2-62
 EN60335-2-63
 EN60335-2-64
 EN60335-2-65
 EN60335-2-66
 EN60335-2-67
 EN60335-2-68
 EN60335-2-69
 EN60335-2-70
 EN60335-2-71
 EN60335-2-72
 EN60335-2-73
 EN60335-2-74
 EN60335-2-75
 EN60335-2-76
 EN60335-2-77
 EN60335-2-78
 EN60335-2-79
 EN60335-2-80
 EN60335-2-81
 EN60335-2-82
 EN60335-2-83
 EN60335-2-84
 EN60335-2-85
 EN60335-2-86
 EN60335-2-87
 EN60335-2-88
 EN60335-2-89
 EN60335-2-90
 EN60335-2-91
 EN60335-2-92
 EN60335-2-93
 EN60335-2-94
 EN60335-2-95
 EN60335-2-96
 EN60335-2-97
 EN60335-2-98
 EN60335-2-99
 EN60335-2-100