


UF220APA Series

Size : Ø223 x 71


Unit : mm



Thermally-Protected

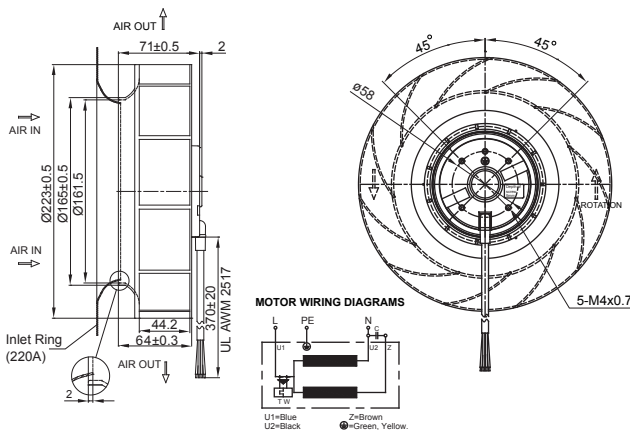

Lead Wire Type

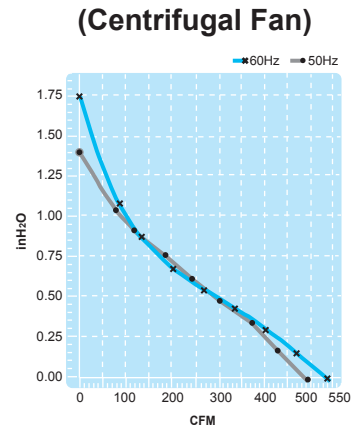

Spec.	Rated	Frequency	Input	Rated	Locked	Speed	Maximum	Maximum	Maximum	Maximum	Capacitor	Noise	Weight
Model	Voltage		Power	Current	Current		Air Flow	Air Flow	Pressure	Pressure			
	V	Hz	W	A	A	RPM	m³/min.	CFM	mmH₂O	InchH₂O	µF/VDB	dB	kg
UF220APA11H2C2A	115	50	90	0.63	0.88	2500	14	500	35	1.4	10/250	65	1.5
		60	117	0.80	0.93	2650	15	530	38	1.7		70	
UF220APA23H2C2A	230	50	90	0.35	0.47	2500	14	500	35	1.4	2/450	65	1.5
		60	117	0.39	0.49	2650	15	530	38	1.7		70	