
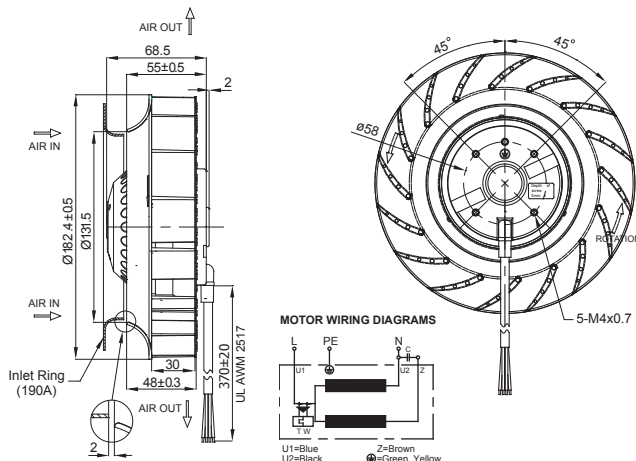


# UF180(55)APA Series

Size :  $\varnothing 182.4 \times 68.5$   
Unit : mm

## (Centrifugal Fan)

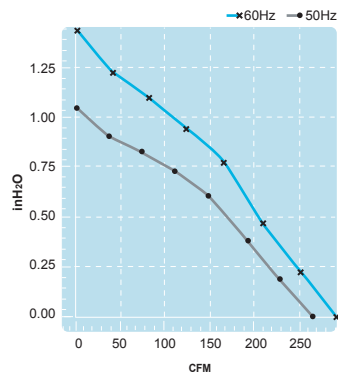

**Thermally-Protected**



## Lead Wire Type

| Spec.                   | Rated Voltage | Frequency | Input Power | Rated Current | Locked Current | Speed | Maximum Air Flow     | Maximum Air Flow | Maximum Pressure   | Maximum Pressure     | Capacitor | Noise | Weight |
|-------------------------|---------------|-----------|-------------|---------------|----------------|-------|----------------------|------------------|--------------------|----------------------|-----------|-------|--------|
| Model                   | V             | Hz        | W           | A             | A              | RPM   | m <sup>3</sup> /min. | CFM              | mmH <sub>2</sub> O | InchH <sub>2</sub> O | μF/VDB    | dB    | kg     |
| UF180(55)APA<br>11H2C2A | 115           | 50        | 63          | 0.60          | 0.92           | 2550  | 7.5                  | 265              | 26                 | 1.0                  | 10/250    | 64    | 1.2    |
|                         |               | 60        | 78          | 0.70          | 0.95           | 2800  | 8.3                  | 290              | 36                 | 1.4                  |           | 67    |        |
| UF180(55)APA<br>23H2C2A | 230           | 50        | 63          | 0.30          | 0.46           | 2550  | 7.5                  | 265              | 26                 | 1.0                  | 2/450     | 64    | 1.2    |
|                         |               | 60        | 78          | 0.34          | 0.48           | 2800  | 8.3                  | 290              | 36                 | 1.4                  |           | 67    |        |